





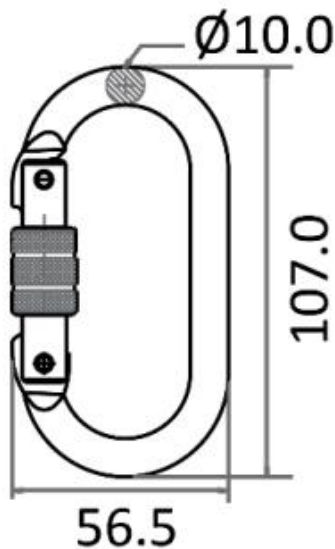


# FICHA TÉCNICA

## VMO001K



REF.	FA 50 101 17
CE	EN 362:2004 Class B & M
	25 kN / 18 mm
MAT.	
	SCREW
KEYLOCK	---
+	---
	0.16 KG

	MAT.	
Résistance à la rupture / Ouverture Breaking strength / Gate opening	Matière Material	Type d'ouverture Opening system
Resistencia a la ruptura / Apertura Resistenza alla rottura / Apertura	Material Materia	Tipo de apertura Sistema di apertura
Bruchfestigkeit / Öffnung	Material	Öffnungssystem

HS CODE	73269098
CARTON SIZE / PCS.	38x28x23/100
AET (EU) N°2777/10347-02/E03-01	Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.02	SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland
AET (UKCA) N°AB0321/16053-01/E01-01	Satra Technology Centre, N°0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom
MODULE D 11 IN14/14003	SGS United Kingdom Ltd., N°0120 Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom

Frimisal Distribuciones, S.L.

Avda. Canaletes, 45 - 08290 Cerdanyola (Barcelona)  
 C/ Repostería, 7 - Pgno. Ind. San Rafael - 41620 Marchena (Sevilla)  
 Telf. 902 125 661 - Fax. 902 102 156 - E-Mail; info@frimsal.es  
<http://www.frimisal.com>