


# FICHA TÉCNICA

**VCU099\*K**



+

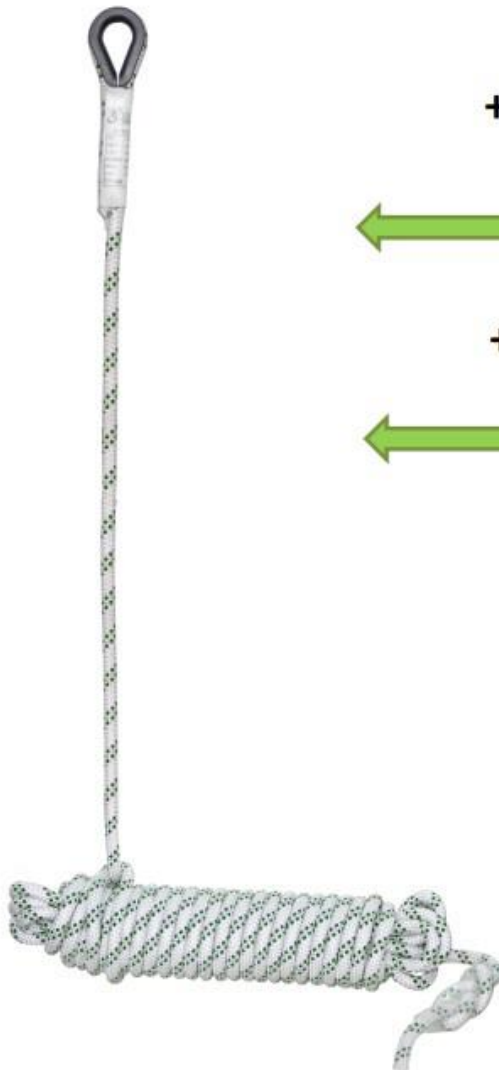

**FA 20 103 00A**





+



**FA 20 103 00B**




<b>HS CODE</b>
56090090
<b>CARTON SIZE / PCS.</b>
FA 20 103 10 : 60 x 40 x 24 cm / 10 FA 20 103 20 : 40 x 40 x 24 cm / 5 FA 20 103 30 : 60 x 40 x 24 cm / 5 FA 20 103 40 : 80 x 40 x 24 cm / 5 FA 20 103 50 : 80 x 40 x 24 cm / 4
AET N°2777/10850-02/E01-01 AET N°2777/10858-02/E01-01 AET N°2777/10860-02/E01-01
<b>Satra Technology Europe Ltd., N° 2777,</b> Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
<b>MODULE D FI14/14003.02</b>
<b>SGS Fimko Oy, N°0598</b> Takomotie 8, 00380 HELSINKI, Finland
<b>AET (UKCA) N°AB0321/16028-01/E01-01</b>
<b>Satra Technology Centre, N°0321</b> Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom
<b>MODULE D 11 IN14/14003</b>
<b>SGS United Kingdom Ltd., N°0120</b> Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom


<b>REF.</b>	<b>FA 20 103 10   FA 20 103 20   FA 20 103 30   FA 20 103 40   FA 20 103 50</b>
<b>LG.</b>  <b>KG</b>	10m   20 m   30 m   40 m   50 m
<b>CE</b>	EN 353-2:2002, EN 358:2018
<b>MAT.</b>	PA Ø 11 mm
	NO
	---
<b>R(kN)</b>	15 kN
<b>+</b>	FA 20 103 00A, FA 20 103 00B
	1.50 kg   2.55 kg   3.60 kg   4.65 kg   5.70 kg

**LG.**  
  
**KG**

**Longueur** Poids maxi utilisateur  
**Length** Max. user weight  
**Longitud** Peso máximo del usuario  
**Lunghezza** Peso Max. dell'utente  
**Länge** Höchstgewicht des Benutzers



**Matière connecteur**  
 Material of connector  
**Material conector**  
 Materiale connettore  
**Material des Verbinders**



**Coulisseau doté d'un point fixe**  
 Rope grab with a fixed point lock  
**Corredera provista de punto fijo**  
 Guida a punto fisso  
**Gleitelement mit Festpunkt**

**+**

**À utiliser avec**  
 To be used with  
**Para usar con**  
 Ad essere utilizzato con  
**Verwendet werden soll mit**